



2.1.2 Jib lengths, Load diagrams, Speeds

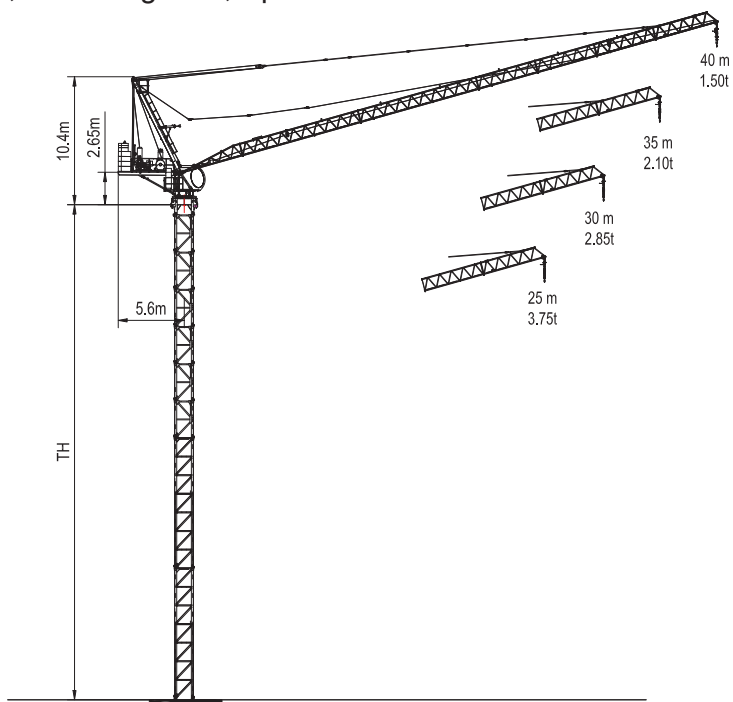

Hoisting 22 kW					Luffing 22 kW	Slewing 5.5 kw
P _{max}		6.0 [to]				
	Load [to]	1.5	2.2	3.0	t=2.8 min	0.70 rpm
	V [m/min]	40.0	30.0	20.0		
	Load [to]	3.0	4.4	6.0	Power requirement (upper part)	63 KVA
	V [m/min]	20.0	15.0	10.0		

起重臂与平衡臂 Jib and Counter Jib

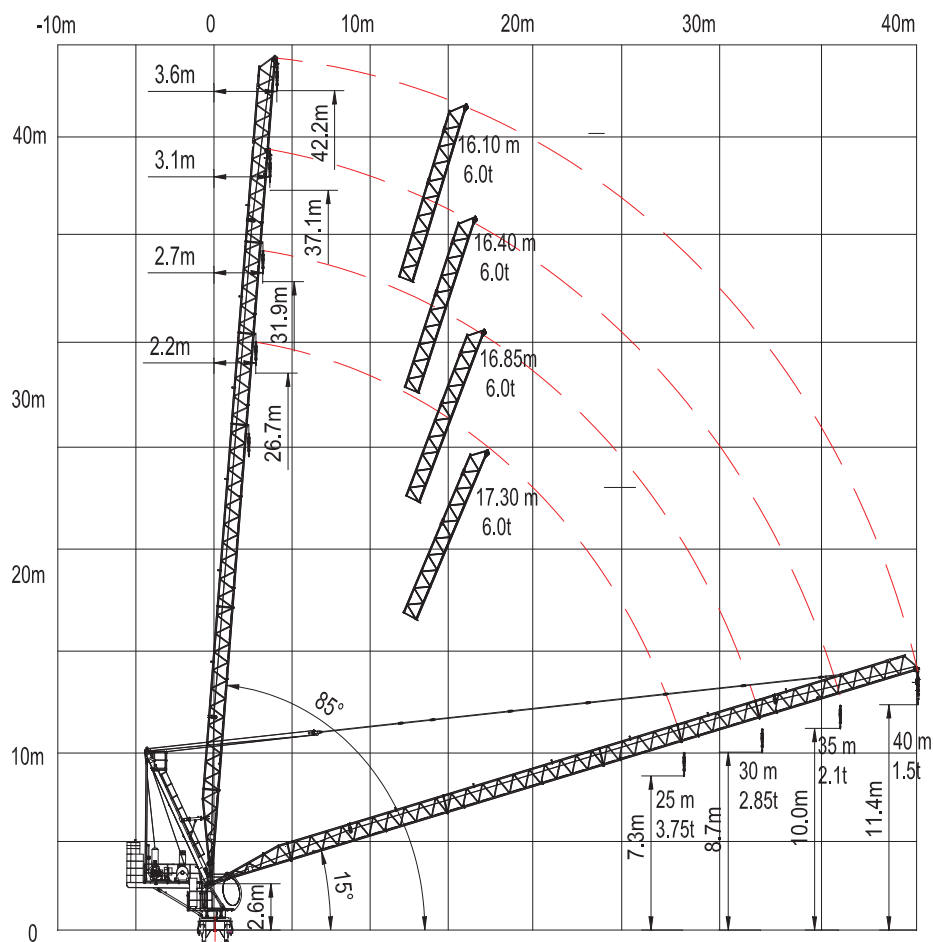

起重性能 Load Capacity

Jib 起重臂		Max.load 最大起重重量		Jib Reach 臂长					
		t	m	15	20	25	30	35	40
40m		3.00	27.18	3.00	3.00	3.00	2.54	1.94	1.50
		6.00	16.11	6.00	4.63	3.21	2.39	1.79	1.35
35m		3.00	28.20	3.00	3.00	3.00	2.72	2.11	
		6.00	16.40	6.00	4.71	3.43	2.57	1.96	
30m		3.00	29.27	3.00	3.00	3.00	2.88		
		6.00	16.89	6.00	4.82	3.58	2.73		
25m		3.00	25.00	3.00	3.00	3.00			
		6.00	17.32	6.00	5.05	3.76			